

Splice Closure for Fiber Optic Cable



XTND-403A

FEATURES

- XTND-403A protects fiber optic splicing point in various installation conditions such as aerial, manholes, ducts, wall and direct buried applications.
- It is specially designed for FTTH network and applicable to multi branching installation by using mid-plate which is for increasing core capacity and complying with the requirements in each point of network.
- The flat type gasket ensures reliable sealing performance by preventing air and water leak and the corn type sealing socket provides easy and reliable installation.
- This closure has high mechanical strength against any environmental conditions. With Xtnd-Connect's XTND-403A, you can improve your network system to the higher level.



SPECIFICATIONS

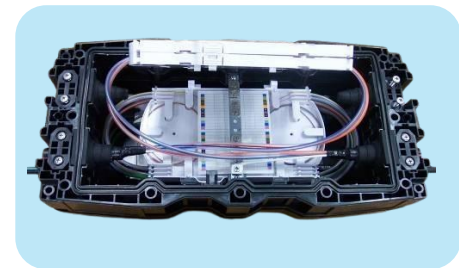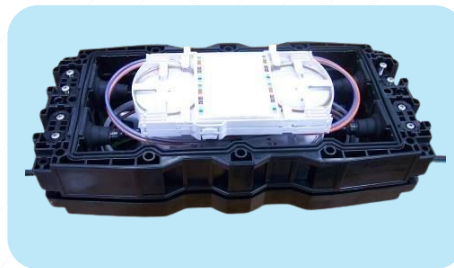

	XTND-403A-SS	XTND-403A-SD	XTND-403A-DD
Size (mm) L×W×H	435 x 205 x 113	435 x 205 x 167	435 x 205 x 221
Weight (kg)	2.8	3.8	4.8
Main Entry Ports	4 Ports/Closure	8 Ports/Closure	12 Ports/Closure
Cable Dia.(mm)	3 ~ 20	3 ~ 20	3 ~ 20
No. of Splice Tray	4	6	8
Tray Capacity	24F (up to 48F)	24F (up to 48F)	24F (up to 48F)
Splice Capacity	96F (up to 192F)	144F (up to 288F)	192F (up to 384F)
Splice Method	Fusion, Mechanical, Connector		
Splice Protector	Heat Shrinkable Sleeve, Mechanical Splicer		
Tension Member	Galvanized Steel Wire, FRP		
IP Rating	Complied with IP68 in accordance with Telcordia International standard		



Splice Closure for Fiber Optic Cable

XTND-403A

CONFIGURATIONS



Items	Descriptions	Unit	Q'ty	Remarks
A	Upper Main Body	EA	1	
B	Lower Main Body	EA	1	
C	Splice Tray	EA	1	Standard
D	Unit Protection Tube	EA	4	Standard
E	Cable Tie	EA	Num. of Splice Trays × 4	
F	High Vacuum Grease	EA	1	
G	Splice Tray Band	EA	1	
H	Sheath Holder	SET	4	Note 1
I	Sheath Gasket	SET	4	Note 2
J	Main Body Screws	EA	12	
K	Sheath Holder Adapter	EA	No. of Mono-Branch Type Sheath Holder × 3	Note 3
L	T/M Ass'y	SET	1	
M	Silica Gel	EA	1	
N	Splice Protection Sleeve	EA	-	Optional
O	Main Body Gasket	EA	1	
P	Grounding Wire	EA	4	Optional
Q	Aerial Hanger	EA	2	Optional
R	Manhole Hanger	EA	2	Optional

Splice Closure for Fiber Optic Cable

XTND-403A

(*) Mid Plate Set (SD-Type, DD-Type)



Items	Descriptions	Unit	Q'ty	Remarks
A	Mid Plate	EA	1	
B	Splice Tray	EA	1	
C	Sheath Holder	SET	4	Note 1
D	Sheath Gasket	SET	4	Note 2
E	Grounding	EA	1	Optional
F	Connector Sheath Holder Adapter	EA	No. of Mono-Branch Type Sheath Holder × 3	Note 3
G	T/M Middle Ass'y	SET	1	
H	Splice Tray Band	EA	1	
I	Grounding Wire	EA	4	Optional
J	Mid Plate Gasket	EA	1	
K	Main Body Screw	EA	12	

Splice Closure for Fiber Optic Cable

XTND-403A

Note 1. The type of sheath holder shall be accordance with type of sheath gasket.

(mono, di, tetra or octa-branch type)

Note 2. The type of sheath gasket shall be accordance with customer's requirements.

Note 3. Do NOT provide for di, tetra and octa-branch type sheath gasket.

DIRECTION

Getting Started

- ✔ Confirm the cable structure and the fiber type before starting the work. Different types of fibers cannot be spliced together.
- ✔ Seal the splicing part perfectly to minimize cable damages by moisture. Do not apply any impact to the splicing part.
- ✔ Keep the working place free from moisture or dust. Do not give any impact on the cables. Do not bend or twist cables.
- ✔ During the sheath stripping and the closure assembly procedures, use permitted tools according to an approved fiber optic splicing standard in your region.

Cable Preparation

- ✔ Secure the cables firmly on the working table.
- ✔ Cut off about 1m from the cable end including the pulling eye.
- ✔ Clean the cut area with clean cloth.

Marking a Cutting Point

- ✔ Mark a sheath removing point on the cable with a piece of tape at a 150cm point from the cable cut end. (Figure-1)



Figure 1

- ✔ In case of mid-span branching with mark a sheath removing point on the cable with a piece of tape at a 300cm point from the cable cut end.

Splice Closure for Fiber Optic Cable

XTND-403A

Sheath Removing

- Remove the cable sheath from the marked point by using a sheath stripper. (Figure-2)
Note. Be sure not to damage the fiber optics.
- Remove all plastic tape and dummy filler tubes. (Figure-3)
- After trimming off dummy filler tubes, clean the loose tubes by using jelly cleaner.

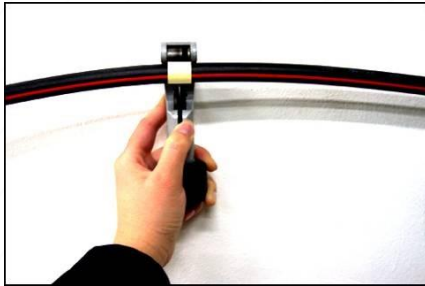


Figure 2

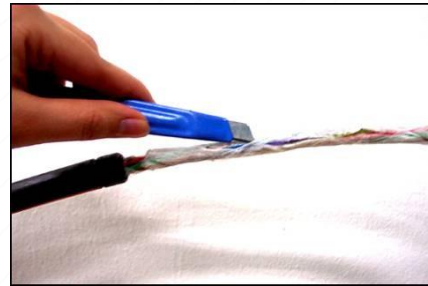


Figure 3

Cutting Tension Member (T/M)

- Leave 14cm from the cable and cut off the tension member. (Figure-4)
Note. Be careful not to cut loose tubes.



Figure 4

- Remove PE coatings from the tension member if required.

Removing Loose Tubes

- Leave about 4cm from the cable sheath end and remove the rest of the loose tube. (Figure-5)
- Clean the cut area by using jelly cleaner.
Note. Be sure not to damage the fiber optics.



Figure 5

Splice Closure for Fiber Optic Cable

XTND-403A

Inserting Unit Protection Tube

- ~ Insert fibers into the unit protection tubes carefully all the way up to the point where loose tubes end. (Figure-6)
- ~ Wrap the tape around the end point of protection tube at cable side. (Figure-7)

Note 1. Be careful not to damage inner fibers.

Note 2. The unit protection tube is provided in different colors for unit identification. The colors are blue, orange, green.

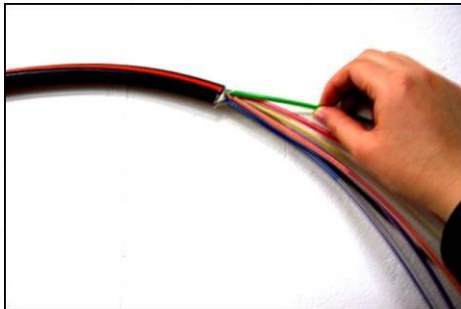



Figure 6



Figure 7

Cutting Sheath Gasket

- ~ Check the outer diameter of the cable and cut off the sheath gasket according to the cable diameter marked on it. (Figure-8, Figure-9, Figure-10, Figure-11)

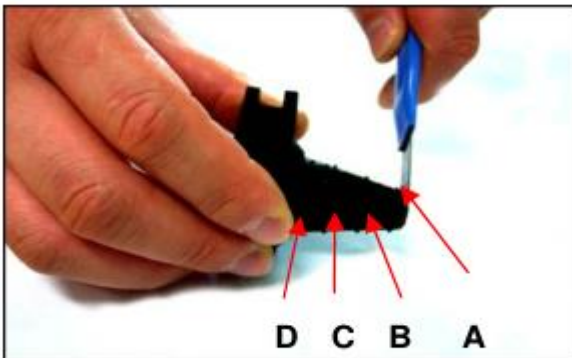

Mono-Branch Type


Cutting Point	Cable Diameter
A	6mm
B	8 ~ 10mm
C	12 ~ 14mm
D	16 ~ 20mm

Di-Branch Type

Cutting Point	Cable Diameter
A	11 ~ 12mm


Splice Closure for Fiber Optic Cable

XTND-403A

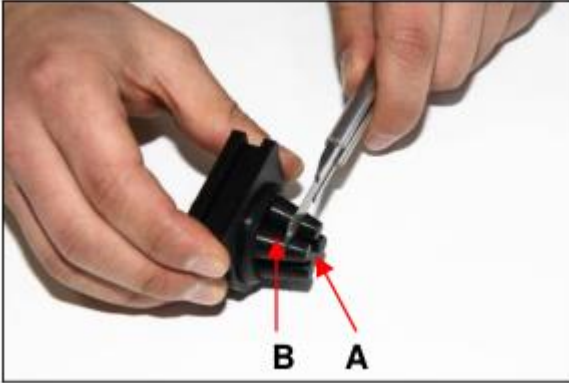

Tetra-Branch Type

Cutting Point	Cable Diameter
A	6 ~ 8mm
B	10 ~ 12mm

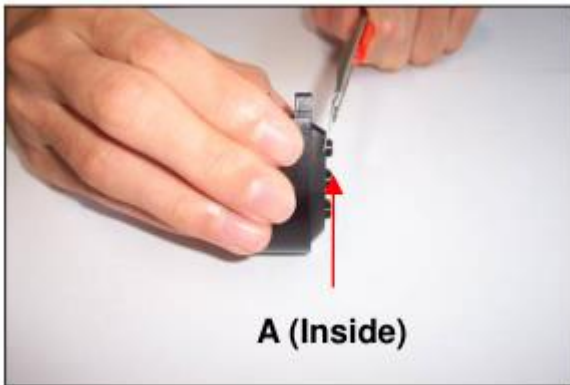

Octa-Branch Type

Cutting Point	Cable Diameter
A	3mm, 5~6mm

~ In case of mid-span branching with mono-branch type sheath gasket, cut off one side of sheathgasket, or by using equivalent. (Figure-12, Figure-13)



Figure 12



Figure 13

Applying High Vacuum Grease

~ Apply the high vacuum grease on the cable end to prevent the cable sheath from scratch and make it easy for sheath gasket insertion. (Figure-14)

Splice Closure for Fiber Optic Cable

XTND-403A



Figure 14

- In case of mid-span branching with mono-branch type sheath gasket, apply the high vacuum grease on the cutting surface of sheath gasket. (Figure-15)



Figure 15

Inserting Sheath Gasket

- Pass the unit protection tubes through the sheath gasket to the cable cut end. (Figure-16)
- In case of mid-span branching with mono-branch type sheath gasket, insert cable into sheath gasket and fasten sheath gasket to the cable by using cable tie. (Figure-17)



Figure 16


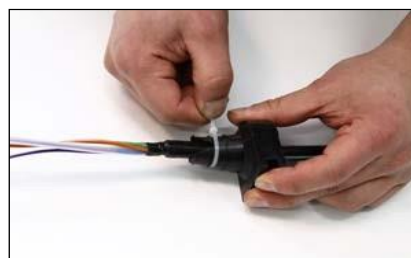


Figure 17

Assembling Sheath Holder Adapter


- Put the required number of sheath holder adapters on the lower groove of the sheath holder according to the cable diameter.

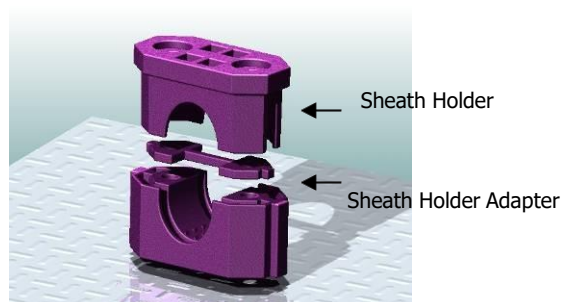

Splice Closure for Fiber Optic Cable

XTND-403A

- Insert the lower part of the sheath holder into the inlet of the closure. (Figure-20)

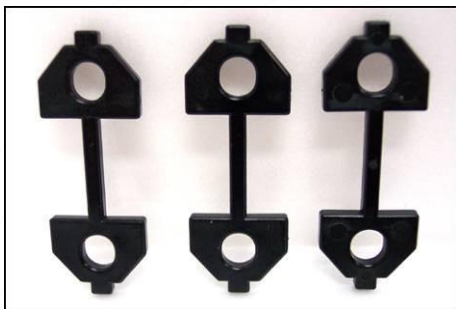

Cable Diameter	Required Q'ty
6 ~ 8mm	-
9 ~ 13mm	1
14 ~ 17mm	2
18 ~ 20mm	3

Fixing Cable Sheath

- Put the optical cable with sheath gasket on the entry of the closure and close it with upper sheathholder. (Figure-21)
- Fix the cable sheath by using a screwdriver. (Figure-22)

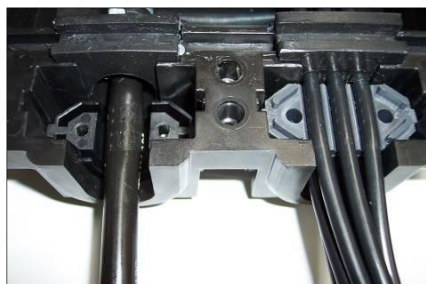


Figure 21

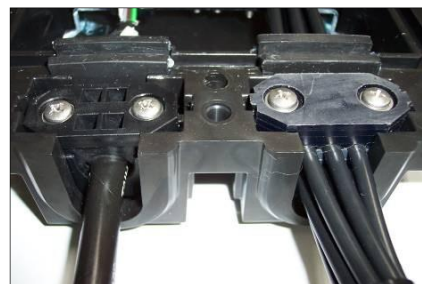


Figure 22

Fixing Tension Member

- Lift up the splice tray and place the T/M (tension member) on the T/M supporter. (Figure-23)
- Put the T/M supporter cover on the T/M and tighten them together by using a screwdriver. (Figure-24)



Figure 23

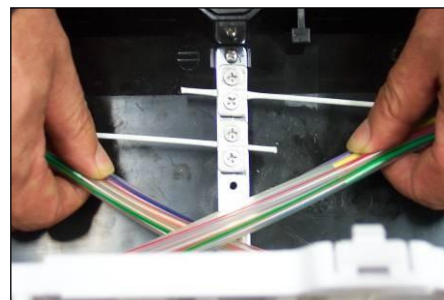


Figure 24

Splice Closure for Fiber Optic Cable

XTND-403A

LAP Grounding (if required)

- Cut the cable sheath about 1cm from the cut end. (Figure-25)
- Connect the grounding wire tab to the sheath and clamp tightly. (Figure-26)

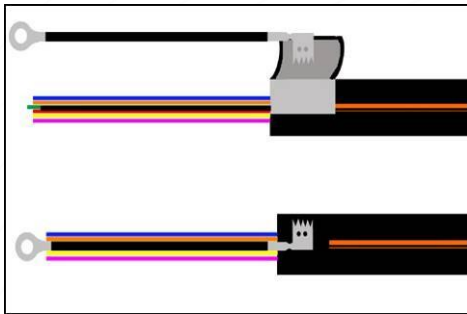


Figure 25

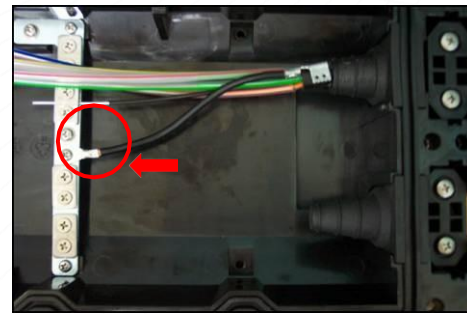


Figure 26

Arranging Unit Protection Tubes

- Arrange the unit protection tubes considering the bending radius. (Figure-27)
- Insert the unit protection tube into the inlet on the splice tray and fix the unit protection tubes by using cable ties. (Figure-28)
- In case of mid-span branching with lift up the splice tray and arrange the surplus loose tube

Note. Be careful not to damage the inner fibers

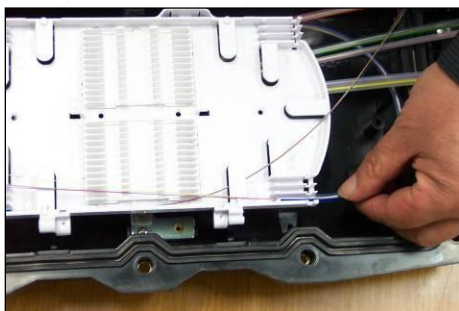


Figure 27

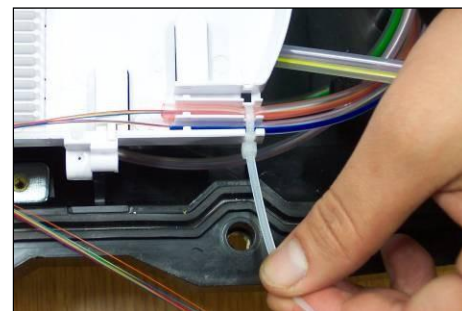


Figure 28

Splicing and Storing Fibers

Preparation

- Clean the working desk and check the fibers carefully.
- Cut each fiber end carefully to make a perpendicular cut to the fiber axis.

Splicing

- Splice fibers in accordance with splicing method to be approved.

Splice Closure for Fiber Optic Cable

XTND-403A

Note 1. Be careful not to twist or bend fibers.

Note 2. There should be no damage or flaw on the cut area and keep the fibers from dust to minimize the data loss.

Note 3. Single mode fibers should be spliced together carefully to maintain a constant center axis.

Note 4. If there is any problems with the splice, then cut the splicing point and splice them again.

Arranging the splices

- After the splice, insert the splice protection sleeve in each slit accordingly. (Figure-29)
- Coil surplus fibers in the tray in a figure 8 shape.
- After the arrangement, apply the O-ring into the slit and close the tray lid.
- Record each splice on the index card on the lid. (Figure-30)

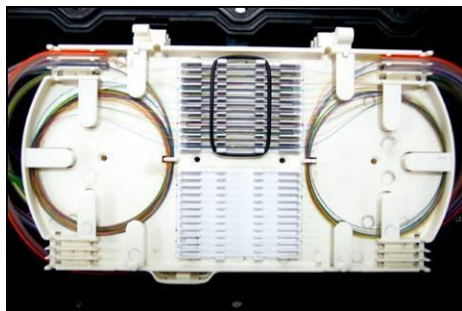


Figure 29

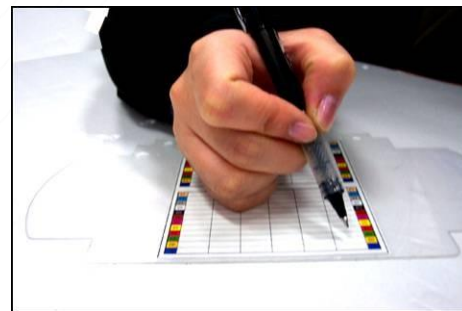


Figure 30

Stacking Splice Trays

- Place the tray cover on the tray properly and stack the trays by using the connection parts on the side.
- Repeat the splicing procedure. (Figure-31, Figure-32)



Figure 31



Figure 32

Splice Closure for Fiber Optic Cable

XTND-403A

- 2 Tie the splice trays by using splice tray band to be provided. (Figure-33)



Figure 33

- 2 Place the silica gel to be provided around the splice trays.

Putting Gasket

- 2 Apply the high vacuum grease on the part of sheath gasket only after cleaning.
- 2 Put the main body gasket on the groove. (Figure-34)

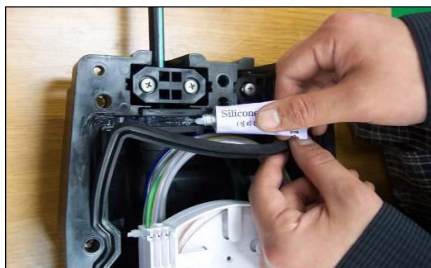


Figure 34

Assembling the Mid Plate (if required)

- 2 Assembling the mid plate in accordance with Procedure 2.1 ~ 2.17 above mentioned.



Figure 35



Figure 36

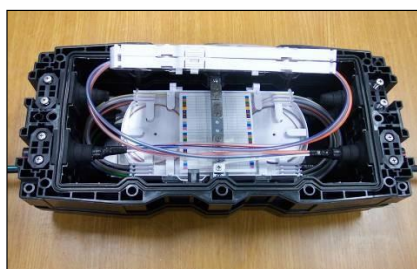


Figure 37



Figure 38

Splice Closure for Fiber Optic Cable

XTND-403A

Note. Connect T/M middle ass'y to T/M ass'y by using grounding connector.

Assembling the Closure

- Place the upper main body to the lower one properly. (Figure-39)
- When using the mid plate, place it on to the lower main body and cover the upper one. (Figure-40)

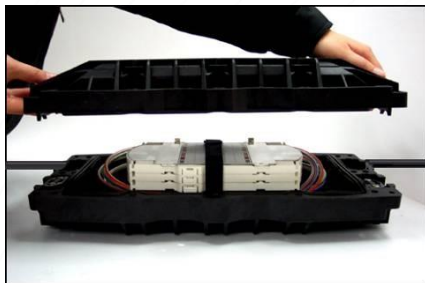


Figure 39

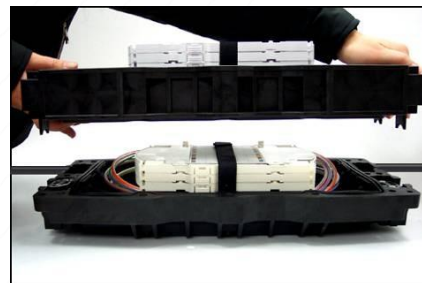


Figure 40

- Tighten the closure body with the provided screws listed below. (Figure-41)

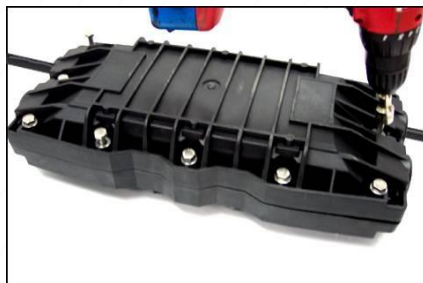


Figure-41

Type	Size	Q'ty
BS403A-SS	M8*L50	12
BS403A-SD	M8*L104	12
BS403A-DD	M8*L160	12

Mounting the Closure

Manhole Mounting

- Connect two hangers to the body with bolts and nuts. (Figure-42)
- Hang the closure on the hanger bar properly by using manhole hangers. (Figure-43)
- In case of using mid-plate, connect two aerial hangers to both right and left side of the body.



Figure 42

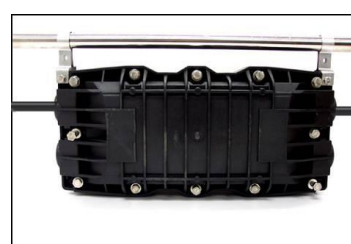


Figure 43

Splice Closure for Fiber Optic Cable

XTND-403A

Aerial Mounting

- ✔ Connect two hangers to the body with bolts and nuts. (Figure-44)
- ✔ Hang the closure on the wire properly by using aerial hangers. (Figure-45)
- ✔ In case of using mid-plate, connect two aerial hangers to both right and left side of the body.

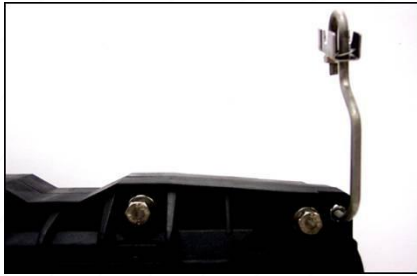


Figure 44



Figure 45

Wall Mounting

- ✔ Connect two hangers to the body with bolts and nuts. (Figure-46)
- ✔ Hang the closure on the hanger bracket properly by using wall mount bracket. (Figure-47)

External Grounding

Connect the external bonding wire to the ground terminal on the closure and connect the opposite end of bonding wire to a designated terminal. (Figure-48)

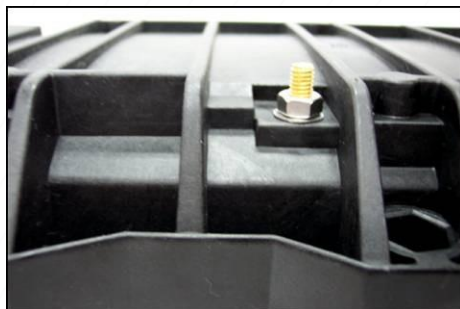


Figure 48

The XTND-403A has been made under strict quality control and tests. Our products passed several inspection criteria, specifications, and other certification standards.

The technical facts of the products are based upon reliable information, but the user should consider the usage and applicability of the product before operation. Sellers do not assume any liability resulting from improper use. The contents of this manual are made in lieu of all warranties, but sellers do not take responsibility for any damage caused by users or any statements unrelated to this manual.