

16F Fiber Optic Inline Closure

HTSC-141A

FEATURES

- ~ Installation and re-entry with minimum of tools
- ~ Easy to be opened and closed
- ~ Re-enterable and reusable
- ~ All hardware is captivated
- ~ Capable of loading 1:8, 1:16 PLC splitter
- ~ Max capacity: **16 SC adapters**

OPTIONAL ACCESSORIES





- ~ Duct mounting kits
- ~ Pole mounting kits
- ~ Pressure valve
- ~ Grounding device

COMPONENTS

- ~ Cover
- ~ Bottom
- ~ Seal gasket
- ~ Clamp
- ~ Splice Tray (with heat shrink sleeves)
- ~ Cable fixing device
- ~ Grounding wire
- ~ Nylon tie
- ~ Labeling paper
- ~ Buffer Tube
- ~ Installation tape

APPLICATION

- ~ Duct Mounting, Pole Mounting, Underground, Wall Mounting.

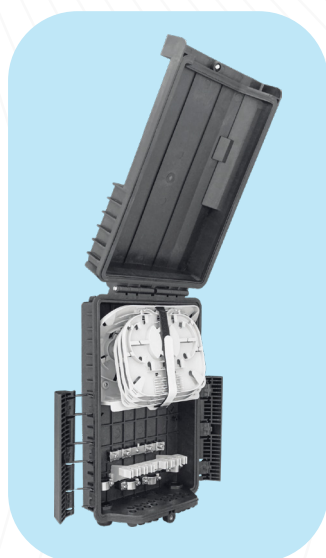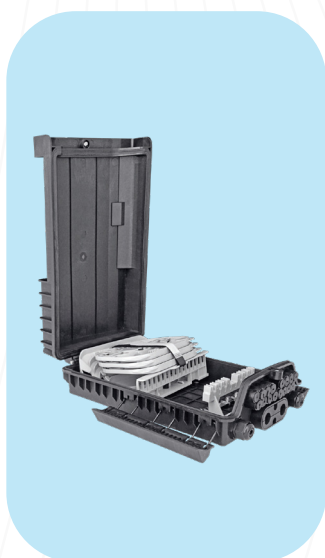

SPECIFICATIONS

| | |
|------------------------|-------------------------------------------------|
| Model No. | HTSC-141A |
| Size (L x W x H) | 305mm x 216mm x 107mm |
| Spliced Fiber Capacity | Standard fiber 16 splices |
| Adapter | Max. 16 SC adapter |
| Cable Ports | Main cables : 4 ports Drop cables : 16 ports |
| Max. Cable Diameter | Main cables : 12mm Drop cables : 3mm / 3x2mm |