

OUTBOX OUTDOOR CABINETS, MOBESE CABINETS

OUTBOX series field cabinets offers security solutions in many areas such as, organized industrial zones, factories, roads, junctions, pedestrian crossings, airports and peripherals, car parks, border gates, customs hotels, sports facilities, demonstration areas, sites, dams, natural gas and power plants.



GENERAL FEATURES



- It prevents dust and water ingress in IP55, IP65, IP66, IP67 protection classes according to EN60529 standard.
- Gasket; Thanks to its completely sealed cover, dust and water ingress is prevented.
- Double Wall Heat Insulation; It is used to minimize heat problems of panels against regional and environmental conditions. It consists of 2 parts: Insulation and Inner Wall.
- Base; It is designed to increase the height of the panels from the floor, fix them to the floor, and facilitate wiring at the bottom.
- Optional installation opportunity is provided in different areas with the Mast and Wall Mounts.
- Ventilation; Passive ventilation is provided through the ducts on the right and left sides of the cabin. Fan unit can be installed to discharge the heated air inside the cabin.



OUTBOX OUTDOOR CABINETS, MOBESE CABINETS



Product Code	Product Detail	Width (mm)	Depth (mm)	Height (mm)
OUTBOX Mini Outdoor Cabinets / SINGLE HULL				
XT-OBX304020-T00-CC	OUTBOX Mini W=300mm H=400mm D=200mm / Single Hull	300	200	400
XT-OBX405030-T00-CC	OUTBOX Mini W=400mm H=500mm D=300mm / Single Hull	400	300	500
OUTBOX Outdoor Cabinets W=600mm D=450mm / SINGLE HULL				
XT-OBX07U6045-T00-CC	OUTBOX 07U 19" W=600mm D=450mm / Single Hull	600	450	470
XT-OBX09U6045-T00-CC	OUTBOX 09U 19" W=600mm D=450mm / Single Hull	600	450	530
XT-OBX12U6045-T00-CC	OUTBOX 12U 19" W=600mm D=450mm / Single Hull	600	450	660
XT-OBX16U6045-T00-CC	OUTBOX 16U 19" W=600mm D=450mm / Single Hull	600	450	840
XT-OBX20U6045-T00-CC	OUTBOX 20U 19" W=600mm D=450mm / Single Hull	600	450	1000
XT-OBX26U6045-T00-CC	OUTBOX 26U 19" W=600mm D=450mm / Single Hull	600	450	1270
OUTBOX Outdoor Cabinets W=600mm D=600mm / SINGLE HULL				
XT-OBX07U6060-T00-CC	OUTBOX 07U 19" W=600mm D=600mm / Single Hull	600	600	470
XT-OBX09U6060-T00-CC	OUTBOX 09U 19" W=600mm D=600mm / Single Hull	600	600	530
XT-OBX12U6060-T00-CC	OUTBOX 12U 19" W=600mm D=600mm / Single Hull	600	600	660
XT-OBX16U6060-T00-CC	OUTBOX 16U 19" W=600mm D=600mm / Single Hull	600	600	840
XT-OBX20U6060-T00-CC	OUTBOX 20U 19" W=600mm D=600mm / Single Hull	600	600	1000
XT-OBX26U6060-T00-CC	OUTBOX 26U 19" W=600mm D=600mm / Single Hull	600	600	1270

Product Code	Product Detail	Width (mm)	Depth (mm)	Height (mm)
OUTBOX Outdoor Cabinets W=600mm D=450mm / DOUBLE HULL				
XT-OBX07U6045-CE1-CC	OUTBOX 07U 19" W=600mm D=450mm / Double Hull	600	450	470
XT-OBX09U6045-CE1-CC	OUTBOX 09U 19" W=600mm D=450mm / Double Hull	600	450	530
XT-OBX12U6045-CE1-CC	OUTBOX 12U 19" W=600mm D=450mm / Double Hull	600	450	660
XT-OBX16U6045-CE1-CC	OUTBOX 16U 19" W=600mm D=450mm / Double Hull	600	450	840
XT-OBX20U6045-CE1-CC	OUTBOX 20U 19" W=600mm D=450mm / Double Hull	600	450	1000
XT-OBX26U6045-CE1-CC	OUTBOX 26U 19" W=600mm D=450mm / Double Hull	600	450	1270
OUTBOX Outdoor Cabinets W=600mm D=600mm / DOUBLE HULL				
XT-OBX07U6060-CE1-CC	OUTBOX 07U 19" W=600mm D=600mm / Double Hull	600	600	470
XT-OBX09U6060-CE1-CC	OUTBOX 09U 19" W=600mm D=600mm / Double Hull	600	600	530
XT-OBX12U6060-CE1-CC	OUTBOX 12U 19" W=600mm D=600mm / Double Hull	600	600	660
XT-OBX16U6060-CE1-CC	OUTBOX 16U 19" W=600mm D=600mm / Double Hull	600	600	840
XT-OBX20U6060-CE1-CC	OUTBOX 20U 19" W=600mm D=600mm / Double Hull	600	600	1000
XT-OBX26U6060-CE1-CC	OUTBOX 26U 19" W=600mm D=600mm / Double Hull	600	600	1270



450 WATT SOĞUTMA KAPASİTESİ
450 WATT COOLING CAPACITY

DİKİLİ TİP YAN KAPAK MONTAJ
WALL MOUNT DOOR TYPE

DIŞ ORTAM KLİMASI
OUTDOOR TYPE COOLING UNIT

PASLANMAZ ÇELİK
STAINLESS STEEL

A SINIFI EKİPMAN
A CLASS EQUIPMENT

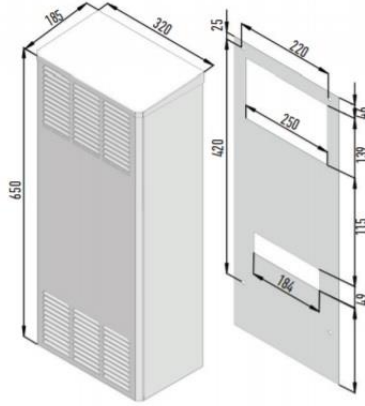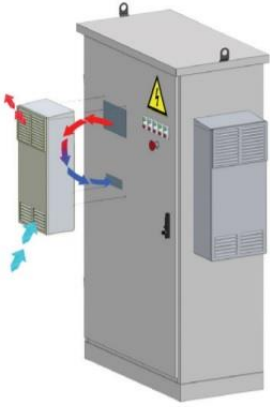

TEKNİK BİLGİLER

TECHNICAL DETAILS

0-500

Soğutma Kapasitesi L35 L35	Cooling Capacity L35 L35	450 W
Soğutucu Gaz Tipi	Type Of Refrigerant	R 134a
Soğutucu Gaz Miktarı	Amount Of Refrigerant	290 gr
Termostat Fabrika Ayarı	Termostat Setting	34 °C
Difransiyel	Hysteresis	4 °C
Dış Ünite Fan Debisi	External Circuit	540 m ³ /h
İç Ünite Fan Debisi	Internal Circuit	290 m ³ /h
Enerji Frekansı	Rated Frequency	50/60 Hz
Standart Güç	Standard Power Supply	198 V...252 V
Çekilen Güç	Power Absorbed L35 L35	312 W
Çalışma Akımı	Running Current	1.6 A
Başlangıç Akımı	Starting Current	5.2 A
Ağırlık	Weight	19 kg
Yükseklik x Genişlik x Derinlik	Height x Width x Depth mm	650 X 320 X 185
Metal Aksam Cinsi	Corrosion Protection (cover)	Stainless
Montaj Şekli	Orientation	Wall Mount
Koruma Sınıfı	System of Protection	IP 65
Çalışma Aralığı	Ambient Air Temperature	0°C +55 °C
Kompresör	Compressor	Danfoss-Secop
Fanlar	Fans	EbmPapst

