


SEISMIC RACK CABINET



TECHNICAL FEATURES

Material	Frame ; Anodized aluminum extrusion profiles other parts: 1 , 2 and 2mm steel
Colour	RAL 7035or RAL 9005
Maximum Static Load	Up TO 2000 KG
Finish	Door, Side panels, Top and Bottom covers: Electrostatic Powder Paint. 19 Mounting rails: Zinc- Plated

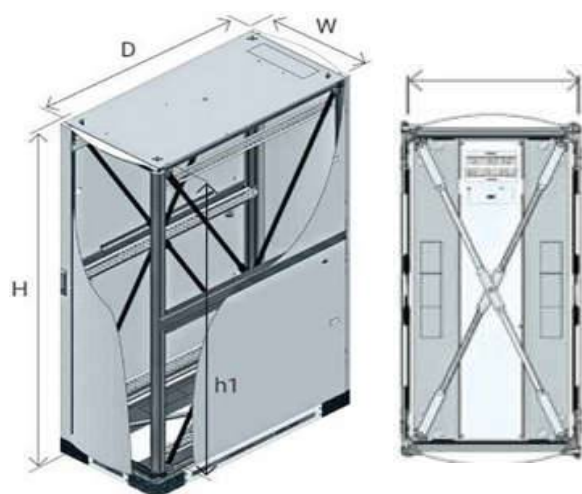

HIGHLIGHTS

Aluminum Frame Structure with 2000kg carrying capacity steel reinforced cross bars in each side of the cabinet including top and bottom.

2 Pairs of depth adjustable 19 mounting Rails

2 Pairs of Adjustable feet

Front Door with Swinghandle multi point Espagnetette

ORDER INFORMATION

HEIGHT U	OUTER WIDTH (W) MM	OUTER DEPTH (D) MM	OUTER HEIGHT (H) MM	INNER WIDHT (WI) MM	INNER HEIGHT (HI) MM	19 RAIL ADJUSTABLE	WEIGHT KG	PART NO
42 U	600	1000	2033	503	950	1898	146	CPB-X-4260A
42 U	600	1200	2033	503	1150	1898	171	CPB-X-4262A
42 U	800	800	2033	703	750	1898	157	CPB-X-4288A
42 U	800	1000	2033	703	950	1898	162	CPB-X-4280A
42 U	800	1200	2033	703	1150	1898	186	CPB-X-4282A

