

288F Fiber Optic Splice Closures



Single Element Max: 24 Trays, 24×12 Fibers

FEATURES

- Modular capacity up to **288 fibers**.
- May be used for cut, uncut and taut sheath applications.
- May be used for all fiber optic cable.
- Sheath retention & central strength member fasten system included.
- Closure construction and lightweight plastic provides strength and resistance to chemical and U.V attack.
- Installation and reentry with a minimum of tools.
- All hardware are included.
- Protection class: **IP68**.
- RoHS compliance.



APPLICATION

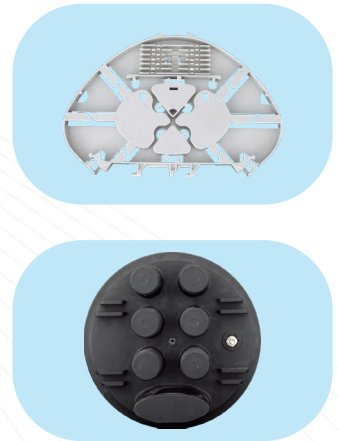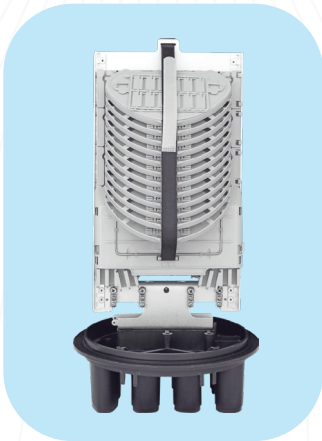

SPECIFICATIONS

Model No.	YT01055 SSC-492250-6P-288-24T/24T-SE 492×265m, 288 Fibers Capacity, 24 Trays, 6 Port, Enclosure , w/o Mounting Kits
Model No.	YT00965 SSC-492250-6P-144-12T/24T-SE 492×265m, 144 Fibers Capacity, 12 Trays, 6 Port, Enclosure , w/o Mounting Kits
Model No.	YT01056 SSC-492250-6P-96-8T/24T-SE 492×265m, 96 Fibers Capacity, 8 Trays, 6 Port, Enclosure , w/o Mounting Kits
Spliced Fiber Storage Capacity	288 splices (24×12)
Size Height x Diameter	492mm x 250mm (w/o clamp), 492mm x 300mm (w/ clamp)
Cable Ports	1 oval port (30mm), 6 round ports (30mm)

Model No.	Wall Mounting Kit - 2 Pole Mounting Kit - 2
-----------	--