

GENEL TOLERANSLAR
A
DIN ISO 2768-m

OLCU
TOL.

>0-6
±0.1

>6-30
±0.2


>30-120
±0.3

>120-400
±0.5

>400-1000
±0.8

>1000-2000
±1.2

>2000-4000
±2

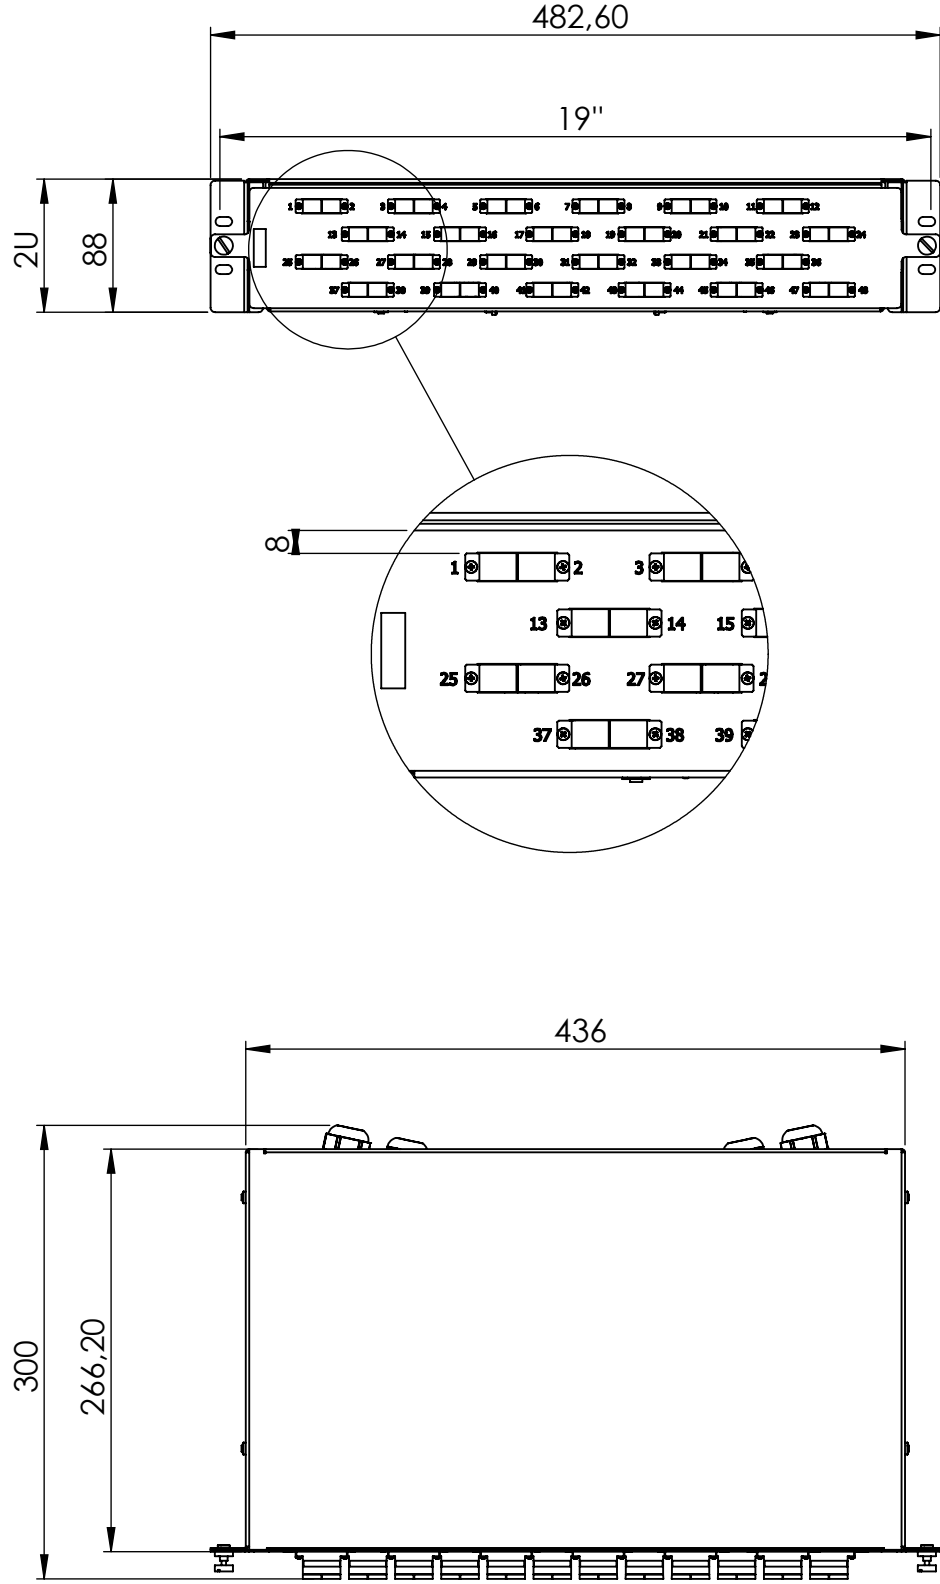


24 PCS SC DUBLEX ADAPTOR

2 PCS 24 SPLICE CASSETTE

4 PCS BEND RADIUS

4 PCS PG16 CABLE GLAND

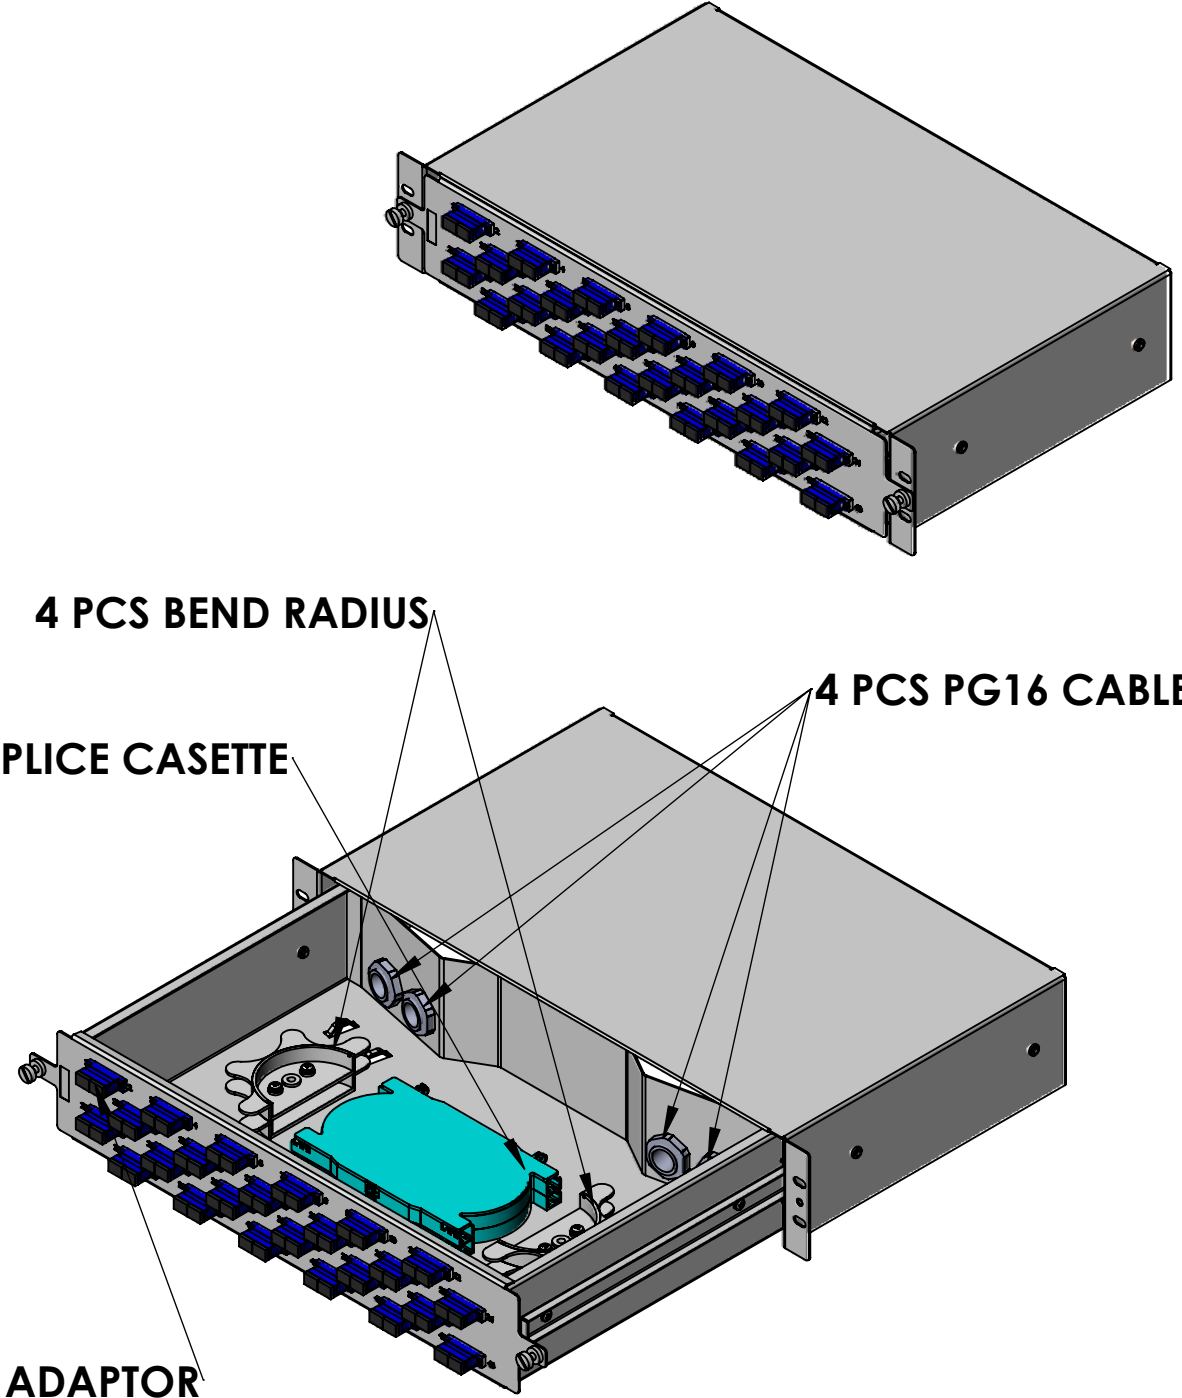

KOD TABLOSU			UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS				FINISH:		KESKİN KENAR VE ÇAPAK OLMAYACAKTIR		CANOVATE®	
BOYA	B	RAL 7035	G	Surface finish: μ						TITLE: 2U 48 PORT SC DUBLEX PATCH PANEL		
		RAL 9005	N	Linear : DIN 7168-m Angular : DIN 7168-m Hole : DIN 7168-m								
MONTAJ	M			NAME	SIGNATURE	DATE	25 Mart 2025 Salı 08:29:50				DWG NO. XTND-FPP-100-48-02-SD7-01-M A3	
		RAL 7035	Q	DRAWN	Gökrem Boz		19.02.2025	MATERIAL:	Thickness			
		RAL 9005	S	MFG	TANJU BAHADIR		19.02.2025		mm			
			CHK'D					SURFACE AREA: -0 dm²				
		RAL 9005	S	Q.A				WEIGHT: 4385.40 Kg	SCALE:1:5		SHEET 2 OF 2	